



## Features




- Internal electronic feedback maintains precise output pressure control.
- Piezoelectric actuator disk provides stability regardless of vibration or position.
- RFI/EMI protection eliminates susceptibility to electromagnetic interference.
- Field selectable outputs in three pressure ranges match final control element requirements.
- Field reversible feature provides output that is directly or inversely proportional to input signal.
- Does not contain copper-based metals.
- Compact size for use in restricted areas.
- -10°F and -40°F temperature ranges available.
- Damping adjustment allows tuning for optimum response.
- Optional version approved for use with Natural Gas or Industrial Methane as a supply media.
- Explosion-proof NEMA 4X, IP65, Type 4 enclosure for outdoor and indoor installations.
- Optional tapped exhaust port vents exhaust gas.
- Canadian Registration Numbers (CRN) certification for all territories and provinces.

## Operating Principles

The Model TXI7800/7801 Transducer is an electronically controlled pressure sensitive device that converts a current signal to a pneumatic output. This device is composed of the Primary Converting Section and the Relay Section. The Piezoelectric ceramic disk in the Primary Section functions as a flapper. The flapper and the nozzle work together to control the signal pressure in the Relay Section. The signal pressure acts on a diaphragm assembly that controls the pressure in the output chamber.

The output pressure is sensed by the lower control diaphragm to maintain the output pressure. The output pressure is also sensed by the feedback control circuit, which compares the output pressure and input signal (setpoint) to maintain constant output pressure.

The Damping Adjustment on the PC Board allows tuning the transducer for optimum response and stability. Large downstream volumes generally require more damping to achieve output pressure stability.

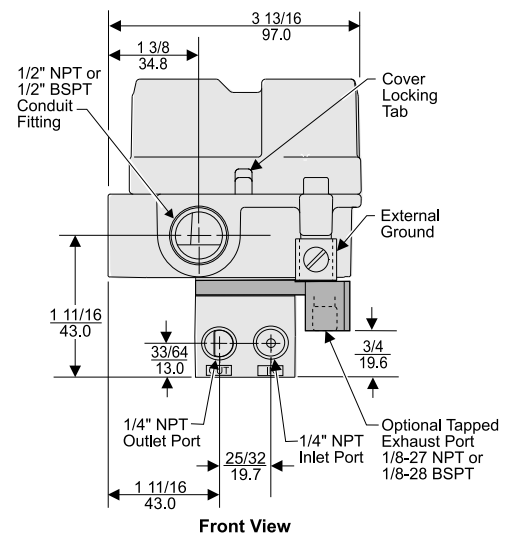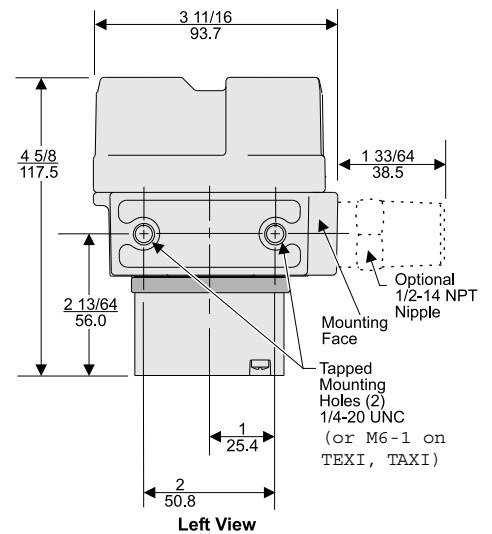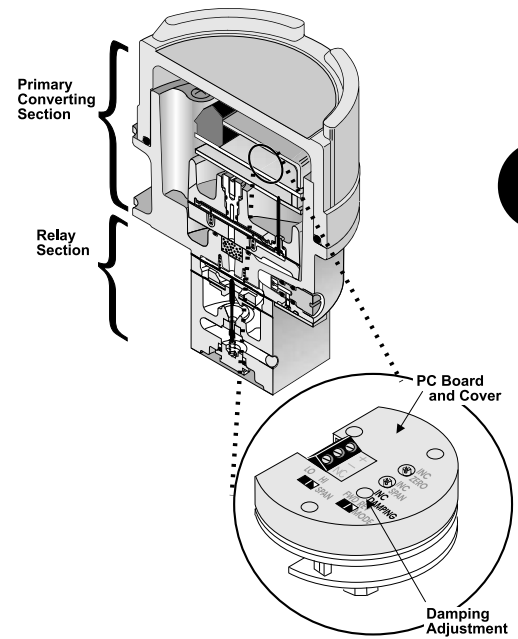

# Model TXI7800/7801 Explosion-Proof Transducer

## Specifications

## SET POINT

	psig [BAR] (kPa)	3 [0.2] (20)	9 [0.6] (60)	15 [1.0] (100)	30 [2.0] (200)
Maximum Air Consumption	All Ranges SCFH	3.5 (.10 m <sup>3</sup> /HR)	7.0 (.20 m <sup>3</sup> /HR)	9.5 (.27 m <sup>3</sup> /HR)	13.5 (.38 m <sup>3</sup> /HR)

Flow Rate (SCFM)		2.5 (4.25 m <sup>3</sup> /HR) @ 25 psig, [1.7 BAR], (170 kPa) supply & 9 psig, [0.6 BAR], (60 kPa) Output	OR	9.0 (15.3 m <sup>3</sup> /HR) @ 120 psig, [8.0 BAR], (800 kPa) supply & 9 psig, [0.6 BAR], (60 kPa) Output
---------------------	--	---	----	--

Temperature Range	Operating Storage Storage	7800 7801 7800/7801	-40°F to + 160°F (-40°C to + 71.2°C) -10°F to + 160°F (-23°C to + 71.2°C) -40°F to + 180°F (-40°C to + 82.2°C)
-------------------	---------------------------------	---------------------------	--

Span/Zero Adjustments	Screwdriver adjustments located under cover			
-----------------------	---	--	--	--

## OUTPUT RANGE

	psig [BAR] (kPa)	3-15 [0.2-1.0] (20-100)	3-27 [0.2-1.8] (20-180)	6-30 [0.4-2.0] (40-200)
--	------------------------	-------------------------------	-------------------------------	-------------------------------

Input Range	4-20 mA			
-------------	---------	--	--	--

Supply Pressure <sup>1,2</sup>		20-120 [1.5-8.0] (150-800)	32-120 [2.2-8.0] (220-800)	35-120 [2.4-8.0] (240-800)
--------------------------------	--	----------------------------------	----------------------------------	----------------------------------

Minimum Span		5 [0.35] (35)	10 [0.7] (70)	10 [0.7] (70)
--------------	--	---------------------	---------------------	---------------------

Frequency Response	-3 db @ 5 Hz per ISA S26.4.3.1 load configuration A.			
--------------------	--	--	--	--

Required Operating Voltages	7.2 VDC @ 20 mA (4-20 mA signal)			
-----------------------------	----------------------------------	--	--	--

Accuracy (ISA S51.1)	0.25% Full Scale Guaranteed 0.15% Full Scale Typical			
----------------------	---	--	--	--

Hysteresis (ISA S51.1)	≤ 0.1% Full Scale			
------------------------	-------------------	--	--	--

Deadband	≤ 0.02% Full Scale			
----------	--------------------	--	--	--

Repeatability (ISA S51.1)	≤ 0.1% Full Scale			
---------------------------	-------------------	--	--	--

Position Effect	No Measurable Effect			
-----------------	----------------------	--	--	--

Vibration Effect	Less than +1% of Span under the following conditions: 5-15 Hz @ 0.75 inches constant displacement 15-500 Hz @ 10 Gs.			
------------------	--	--	--	--

Reverse Polarity Protection	No damage occurs from reversal of normal supply current (4-20 mA) or from misapplication of up to 60 mA.			
-----------------------------	--	--	--	--

RFI/EMI Effect	Less than 0.5% of span @ 30 V/m class 3 Band ABC (20-1000 mHz) per SAMA PMC 33.1 1978 and less than 0.5% of Span @ 10 V/m level, to 2 GHz Band per EN 61000-4-3:1998 +A1 EMC Directive 89/336/EEC European Norms EN 61326			
----------------	---	--	--	--

Supply Pressure Effect	No Measurable Effect			
------------------------	----------------------	--	--	--



Temperature Effect	[+0.5% +0.04% / °F Temperature Change] of Span typical			
--------------------	--	--	--	--

Materials of Construction	Body and Housing .....Chromate Treated Aluminum Orifice .....Aluminum & Sapphire Trim .....Stainless Steel & Zinc Plated Steel Elastomers .....Nitrile Finish .....Epoxy Powder Coating			
---------------------------	---	--	--	--

<sup>1</sup> Supply Pressure must be no less than 5 psig, [0.35 BAR], (35 kPa), above maximum output.

<sup>2</sup> Atex Approved unit 40 psig, [2.8 BAR], (280 kPa). Atex Approved unit with "N" option 120 psig, [8.0 BAR], (800 kPa) for Air or Group IIA gases.

## Hazardous Area Classifications


	Explosion-Proof	Intrinsically Safe					
<b>Factory Mutual (FM) Approvals</b> 	<b>Air as supply pressure media</b> Class I, Division 1, Groups B, C and D; Class II, Division 1, Groups E, F and G; Class III, Division 1, Fibers; Class I, Division 2, Groups A, B, C and D; NEMA 4X Enclosure; Max. Ambient 65°C; Temperature Code T5.	<b>Air as supply pressure media</b> Class I, Division I, Groups C and D; Class II, Division 1, Groups E, F and G; Class III, Division 1; Fibers; NEMA 4X Enclosure; Max. Ambient 65°C; Temperature Code T4.					
	<b>Group D gases, including Natural Gas as supply pressure media</b> Class I, Division 1, Groups C and D; Class II, Division 1, Groups E, F and G; Class I, Division 2, Groups A, B, C and D; Class II, Division 2, Groups E, F and G.	<table><tr><th colspan="2">Entity Parameters</th></tr><tr><td>Vmax<sup>1</sup>= 30 VDC Imax<sup>2</sup>= 200 mA</td><td>Ci<sup>3</sup> = 0 μ F Li<sup>4</sup> = 0 mH</td></tr><tr><td><sup>1</sup>Vmax = Max. Voltage <sup>2</sup>Imax = Max. Current</td><td><sup>3</sup>Ci = Capacitance <sup>4</sup>Li = Inductance</td></tr></table>	Entity Parameters		Vmax <sup>1</sup> = 30 VDC Imax <sup>2</sup> = 200 mA	Ci <sup>3</sup> = 0 μ F Li <sup>4</sup> = 0 mH	<sup>1</sup> Vmax = Max. Voltage <sup>2</sup> Imax = Max. Current
Entity Parameters							
Vmax <sup>1</sup> = 30 VDC Imax <sup>2</sup> = 200 mA	Ci <sup>3</sup> = 0 μ F Li <sup>4</sup> = 0 mH						
<sup>1</sup> Vmax = Max. Voltage <sup>2</sup> Imax = Max. Current	<sup>3</sup> Ci = Capacitance <sup>4</sup> Li = Inductance						
<b>Canadian Standards Association (CSA) Approvals</b> 	<b>Air as supply pressure media</b> Class I, Division 1, Groups B, C and D; Class II, Division 1, Groups E, F and G; Class I, Division 2, Groups A, B, C and D; Class II, Division 2, Groups E, F and G. Type 4X Enclosure; Temperature Code T5; Max. Ambient 65°C.	<b>Air as supply pressure media</b> Class I, Division 1, Groups C and D; Class II, Division 1, Groups E, F and G; Type 4X Enclosure; Temperature Code T4; Rated 4-20 mA, 30 VDC maximum.					
	<b>Group D gases, including Natural Gas as supply pressure media</b> Class I, Division 1, Groups C and D; Class II, Division 1, Groups E, F and G; Class I, Division 2, Groups A, B, C and D. Class II, Division 2, Groups E, F and G.	<b>Approvals are valid when connected through a Shunt Zener Diode Safety Barrier meeting the following parametric requirements:</b> <table><tr><td>System Type 1:</td><td>Single Channel Polarized Rated: 28.5V Max. 300 Ohm Min.</td></tr><tr><td>System Type 2:</td><td>Dual Channel Polarized Rated 28.5V Max. 300 Ohm Min. and 28V Diode return per channel</td></tr><tr><td>System Type 3:</td><td>Dual Channel Polarized Rated: 28.5V Max. 300 Ohm Min. and 10V Max. 50 Ohm Min.</td></tr></table>	System Type 1:	Single Channel Polarized Rated: 28.5V Max. 300 Ohm Min.	System Type 2:	Dual Channel Polarized Rated 28.5V Max. 300 Ohm Min. and 28V Diode return per channel	System Type 3:
System Type 1:	Single Channel Polarized Rated: 28.5V Max. 300 Ohm Min.						
System Type 2:	Dual Channel Polarized Rated 28.5V Max. 300 Ohm Min. and 28V Diode return per channel						
System Type 3:	Dual Channel Polarized Rated: 28.5V Max. 300 Ohm Min. and 10V Max. 50 Ohm Min.						
	Flame-Proof	Intrinsically Safe					
<b>Explosive Atmospheres Directive (ATEX) Approvals*</b>	<b>Air as supply pressure media</b> ⊕ II 2 GD EEx d IIB + H <sub>2</sub> , T5 (-20°C to + 65°C) Ambient; IP65 Enclosure.	<b>Air as supply pressure media</b> ⊕ II 1 G (T4) II1D (T 85°C) EEx ia IIB, T4 (-20° C to +72° C) Ambient; IP65 Enclosure.					
	<b>Group IIA gases, including Natural Gas as supply pressure media</b> ⊕ II 2 GD EEx d IIB , T5 (-20° C to + 65° C) Ambient; IP65 Enclosure.						
<b>Standards Australia (SAA) Approvals*</b>	<b>Air as supply pressure media</b> Ex d IIB + H <sub>2</sub> , T5 (-20° C to + 65° C) Ambient; IP65 Enclosure.	<b>Air as supply pressure media</b> Ex ia IIB , T4 (-20° C to +72° C) Ambient.					

* Transducer Parameters			
U <sub>max</sub> <sup>1</sup> = 28 V I <sub>max</sub> <sup>2</sup> = 100 mA	P <sub>i</sub> <sup>3</sup> = 0.7 W C <sub>i</sub> <sup>4</sup> = 0	L <sub>i</sub> <sup>5</sup> = 0	
<sup>1</sup> U <sub>max</sub> = Max. Voltage <sup>2</sup> I <sub>max</sub> = Max. Current	<sup>3</sup> P <sub>i</sub> = Max. Power <sup>4</sup> C <sub>i</sub> = Capacitance	<sup>5</sup> L <sub>i</sub> = Inductance	

**B**  
Model  
TXI  
7800/  
7801

# Model TXI7800/7801 Explosion-Proof Transducer

## Mounting Kit

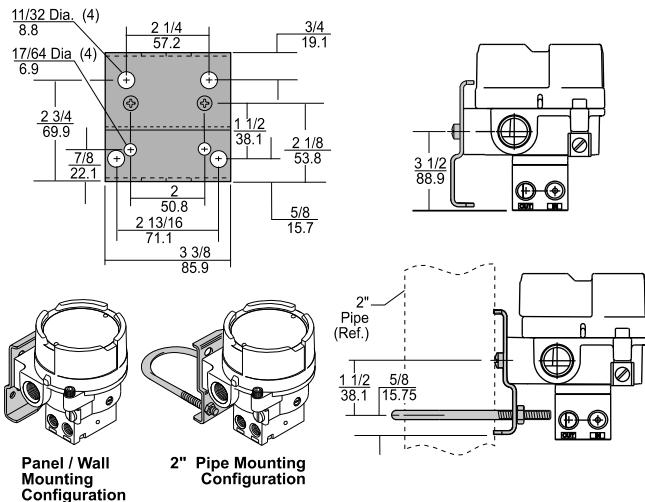

## Model TXI7800/7801 Transducer Kits & Accessories

### Mounting Bracket Kits

- 19021-1: TCXI7800/7801, TFXI7800/7801 (sold separately)
- 19021-2: TEXI7800/7801, TAXI7800/7801 (sold separately)

## Catalog Information

### Catalog Number

T  X I 780

Underwriting Group

SAA ..... A

Canadian Standard ..... C

ATEX ..... E

Factory Mutual ..... F

### Temperature Range

- 40°F to +160°F ..... 0
- 10°F to +160°F ..... 1

### Input

- 4-20 mA ..... 4

### Output

- 3-15 psig ..... 01
- 3-27 psig ..... 02
- 6-30 psig ..... 03
- 0-30 psig ..... 04
- 0-60 psig ..... 05
- 0-120 psig ..... 06
- [0.2-1.0 BAR] ..... 11
- [0.2-1.8 BAR] ..... 12
- [0.4-2.0 BAR] ..... 13
- [0-2.0 BAR] ..... 14
- [0-4.0 BAR] ..... 15
- [0-8.0 BAR] ..... 16
- (20-100 kPa) ..... 21
- (20-180 kPa) ..... 22
- (40-200 kPa) ..... 23
- (0-200 kPa) ..... 24
- (0-400 kPa) ..... 25
- (0-800 kPa) ..... 26

### Options

- Tapped Exhaust ..... E
- Natural Gas media approval, Group D gases <sup>4</sup> ..... N
- (Includes Nipple; TCXI, TEXI, TFXI only) <sup>1, 2</sup>
- BSPT Thread <sup>3</sup> ..... U

<sup>1</sup> Not approved for Intrinsically Safe.

<sup>2</sup> Tapped Exhaust option required.

<sup>3</sup> Available for ATEX and SAA only. NOT available with "N" Option.

<sup>4</sup> 10 ft cable standard. Longer lengths available. Contact factory for details and availability.

## Installation

For installation instructions, refer to the *Fairchild Model TXI7800/7801 Explosion-proof Electro-pneumatic Transducer Installation, Installation Instructions, II-5TXI7800*.

For operation and maintenance instructions, refer to the *Fairchild Model TXI7800 Explosion-proof Electro-pneumatic Transducer Operation and Maintenance Instructions, OM-5TXI7800*.

## INSTRUMENTS • CONTROLS • VALVES

**ARCO**  
Engineering, Inc.  
SINCE 1954  
www.arcoengineering.com

3317 Gilmore Industrial Blvd.  
Louisville, KY 40213

Ph: (502) 966-3134  
Fx: (502) 966-3135