

PROCESS & TEMPERATURE DIGITAL PANEL METER



Trident 0.56" LED



Trident X2 1.20" LED



*The Trident X2 Has the **LARGEST** Display of any 1/8 DIN Meter*

- 4-20 mA, ± 10 V, TC & RTD Inputs
- NEMA 4X, IP65 Front
- Shallow Depth Case 3.6" Behind Panel
- Universal Power Supply 85-265 VAC
- Two Relays Option with Alternation & Time Delays
- 4-20 mA Analog Output Option
- 24 VDC @ 200 mA Transmitter Power Option
- RS-232, RS-422/485 Serial Communication Options
- Modbus[®] RTU Option & Free LabVIEW[™] Driver
- Free MeterView[®] Software Download
- Sunlight Readable Display
- 3 Year Warranty



INSTRUMENTS • CONTROLS • VALVES



3317 Gilmore Industrial Blvd.
Louisville, KY 40213
Ph: (502) 966-3134
Fx: (502) 966-3135

www.arcoengineering.com

SINCE 1954

PRECISION DIGITAL CORPORATION



FEATURE RICH & SIMPLE TO USE

The Model PD765 Trident digital panel meter is one of the most versatile digital panel meters on the market and will satisfy a wide variety of process applications. The Trident can be field programmed to accept process voltage (0-5V, 1-5V, etc) and current (4-20 mA) inputs, 100 Ohm RTDs, and the four most common thermocouples. It is housed in a shallow-depth, 1/8 DIN enclosure that features a NEMA 4X front panel and convenient mounting hardware. There are two power options for the Trident: 85 to 265 VAC or 12-36 VDC and it can provide 24 VDC to power the transmitter if needed. Programming and setup can be performed with the four front panel pushbuttons, free MeterView software, or using the Copy function.

TWO DISPLAY SIZES

The display height on the standard Trident meter is 0.56" (14.2 mm) and on the Trident X2 the display height is an astounding 1.2" (30.5 mm). The Trident X2 can be read easily from distances of up to 30 feet! Both meters are available with all Trident features.

The intensity of the display on both versions of the Trident can be adjusted to compensate for various lighting conditions, including direct sunlight.



VERSATILE OPERATION

Look to the Trident meter for the key features and options you want and don't worry about getting bogged down in a confusing array of things you don't need. The Trident's Max/Min function, 2 relays, 4-20 mA output, serial communication, and Modbus RTU options provide all the utility you need to handle all the common applications.

Maximum/Minimum

To display the maximum and minimum readings since the last reset/power-up, use the Up arrow/Max button


Powerful Relay Functionality

All relay functions are set up from the front panel or from a PC running MeterView® or LabView™ software.

- Automatic reset only
- Automatic or manual reset
- Latching or non-latching relays
- Pump alternation control
- On and off time delays from 0 to 199 seconds
- Fail-safe operation is user selectable

Pump Alternation

The Trident, in pump alternation mode, will automatically alternate two pumps:

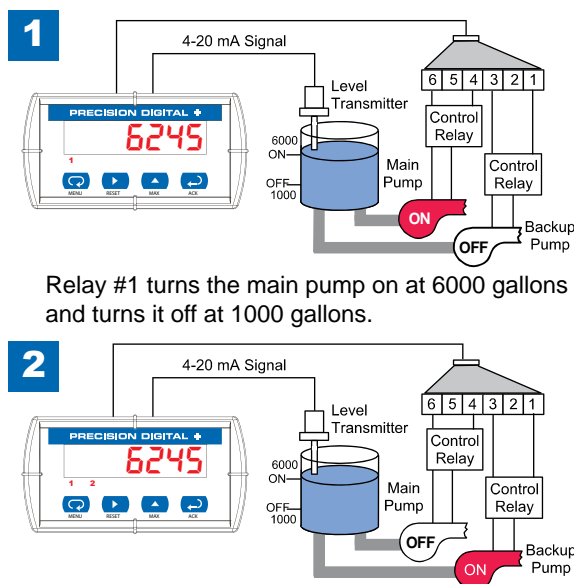

Relay #1 turns the main pump on at 6000 gallons and turns it off at 1000 gallons.

With the Pump Alternation feature activated, the next time the level reaches 6000 gallons, relay #2 transfers and starts the backup pump.

Isolated 4-20 mA Transmitter Output

The Trident's Isolated 4-20 mA output option converts the Trident into a transmitter with a digital display; perfect for temperature applications!

Serial Communication Adapters & Converters



A wide variety of serial communication adapters and converters are available for the Trident meter. A serial adapter and Precision Digital's free MeterView software allows the Trident to be programmed from a computer and to connect to a PC for data acquisition. Adapters are available for RS-232 and RS-422/485 communications. Converters are available for isolated and non-isolated RS-232 to RS-422/485 and USB to RS-422/485.

Modbus RTU

Use the Trident's Modbus RTU communications to connect the Trident to a PLC, SCADA system or other digital device.

EASY SETUP AND PROGRAMMING

The Trident is easily setup and programmed using the simple four-button programming method. The meter can also be programmed using a PC and Precision Digital's free MeterView software or "cloned" with the Copy function. There is only one switch on the entire meter, no jumpers, and no need to ever open the case.

Programming with Four Front Panel Buttons

The Trident's four front panel buttons keep the user in control of the programming process. To see how simple it is to program the Trident, check out the Virtual Meter at www.predig.com.

Trident Virtual Meter

Instructions

1. Select 4-20 mA input
2. Select 0-10 V input
3. Change the decimal point
4. Scale the meter without a signal source
5. Calibrate the meter with a signal source
6. Select thermocouple input type K
7. Select RTD input with 0.00395 coefficient
8. Change Display from Fahrenheit to Celsius
9. Set Up Relays for Automatic Reset
10. Set up relays for latching operation
11. Set up relays for pump alternation control
12. Set up relays for fail-safe operation
13. Set up relay on is off time delays
14. Display maximum & minimum values
15. Try the Meter Copy feature
16. Change display intensity for sunlight applications
17. Setting up a password

Relay 1: On1 Off1 Relay 2: On2 Off2

Input: 20.00 mA

4.00

1000 mA

VR065_v3.000


Press the Menu button to toggle between Run and Program modes.

Reset meter Advanced features menu

Download This demonstration requires Macromedia's Free Flash Player.

Programming From a PC with MeterView®

Precision Digital's free MeterView® software allows all PD765 Trident setup parameters to be programmed from a PC and to save the configuration settings to a file for reporting or programming other meters. And since the serial adapter is an external device, one serial adapter can program an infinite number of meters!

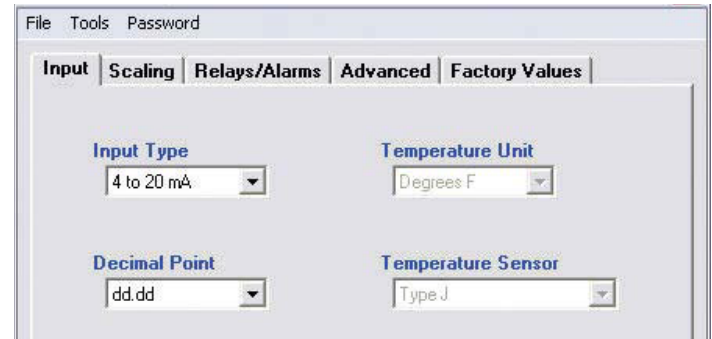

The MeterView screen shot above shows how the input is selected. Notice there are tabs for Scaling, Relays/Alarms, Advanced, and Factory Values.

Meter Copy

The Copy function is used to copy (or clone) all the settings from one Trident meter to other Trident meters in less than 10 seconds. The Copy function is a standard feature on all meters. The Copy feature does not require a serial communication adapter, it only requires the optional cable assembly (PDA7420), see the ordering information for complete details.



NEMA 4 & 4X FIELD ENCLOSURES

Plastic, stainless steel, and painted steel NEMA 4X enclosures for up to 10 Trident meters.



PDA2706



PDA2801

See our complete offering at www.predig.com

DATA ACQUISITION

Digital Panel Meters make a great front end to a PC-based data acquisition system. They are easy to set up, can be used for a wide range of inputs, will power the transmitter, and best of all provide a local display of the process. Precision Digital has the perfect package with its Trident Digital Panel Meters, a wide selection of serial adapters and converters and free MeterView software. Data is displayed on the PC and written to a file that could then be imported into a spreadsheet or other application.

Data Logging up to 100 Trident Meters



Sample File Generated by MeterView®

PD765 Log File

Name: C:\MV3logfile.htm **Created:** 1/6/2006 5:34:12 PM
Serial Port: COM 1 **Connection speed:** 2400 Baud **Logging rate:** 1 update every 10 seconds

Date & Time	Tag Number	Address	Display	Units	Relay 1	Relay 2
1/6/2006 5:34:12 PM	Tank 1 Level	06	17.70	Feet	P1 On	P2 Off
1/6/2006 5:34:12 PM	Tank 2 Level	07	18.18	Feet	P3 Off	P4 Off
1/6/2006 5:34:12 PM	Tank 3 Level	08	20.54	Feet	P5 On	P6 Off
1/6/2006 5:34:12 PM	Tank 1 Temp	09	74	°F	Off	Off
1/6/2006 5:34:12 PM	Tank 2 Temp	10	72	°F	Off	Off
1/6/2006 5:34:12 PM	Tank 3 Temp	11	72	°F	Off	Off
1/6/2006 5:34:22 PM	Tank 1 Level	06	17.58	Feet	P1 On	P2 Off
1/6/2006 5:34:22 PM	Tank 2 Level	07	18.04	Feet	P3 Off	P4 Off
1/6/2006 5:34:22 PM	Tank 3 Level	08	19.79	Feet	P5 Off	P6 Off
1/6/2006 5:34:22 PM	Tank 1 Temp	09	74	°F	Off	Off
1/6/2006 5:34:22 PM	Tank 2 Temp	10	72	°F	Off	Off

Great for tank level monitoring!

Ordering Example:

System consisting of 10 Tridents & MeterView®

Qty	Model	Description
10	PD765-6R2-10	Trident with 2 Relays & 24 VDC Transmitter Supply
10	PDA7422	Trident RS-422/485 Serial Adapter
1	PDA8485-I	USB to RS-422/485 Isolated Converter
1	PDA7503	MeterView® Software download

ORDERING INFORMATION

Trident 0.56" Display		
85-265 VAC** Model	12-36 VDC** Model	Options Installed
PD765-6R0-00*	PD765-7R0-00*	None
PD765-6R0-10*		24 VDC Transmitter Supply
PD765-6R2-00*	PD765-7R2-00*	2 Relays
PD765-6R2-10*		2 Relays & 24 VDC Transmitter Supply
PD765-6R3-00*	PD765-7R3-00*	4-20 mA Output
PD765-6R3-10*		4-20 mA Output & 24 VDC Supply
PD765-6R3-20*		4-20 mA Out & Dual 24 VDC Supplies
Trident X2 1.20" Display		
85-265 VAC** Model	12-36 VDC** Model	Options Installed
PD765-6X0-00	PD765-7X0-00	None
PD765-6X0-10		24 VDC Transmitter Supply
PD765-6X2-00	PD765-7X2-00	2 Relays
PD765-6X2-10		2 Relays & 24 VDC Transmitter Supply
PD765-6X3-00	PD765-7X3-00	4-20 mA Output
PD765-6X3-10		4-20 mA Output & 24 VDC Supply
PD765-6X3-20		4-20 mA Out & Dual 24 VDC Supplies

To order meters with Modbus option enabled, replace the last digit with a "1".
 Modbus option ordered separately by requesting P/N: PDN-MODBUS.
 *Quick Shipment Program product, shipped within 2 working days.
 **All models may be powered from AC or DC, see Specifications for details.

Accessories	
Model	Description
PDA7420	Trident Meter Copy Cable, 7' (2.1 m)
PDA7232	Trident RS-232 Serial Adapter, PDA7420 Included
PDA7422	Trident RS-422/485 Serial Adapter, PDA7420 Included
PDA7485-I	RS-232 to RS-422/485 Isolated Converter
PDA7485-N	RS-232 to RS-422/485 Non-Isolated Converter
PDA7488	Trident RS-232 & RS-485 Isolated Multi-Input Adapter Board
PDA8485-I	USB to RS-422/485 Isolated Converter
PDA8485-N	USB to RS-422/485 Non-Isolated Converter
MeterView®	Free MeterView® Software download at www.predig.com
PDN-MODBUS	Modbus Option Enable

Services	
Model	Description
PDN-CAL	2-Point Input Calibration
PDN-CALDATA	Calibration with Certificate and Data
PDN-CSETUP	Custom Setup




PROCESS & TEMPERATURE INPUTS


The Trident is factory calibrated to accept 4-20 mA, ± 10 VDC, type J, K, T, or E thermocouples and 100 Ω platinum RTDs. Process inputs can be scaled with or without applying an input for virtually any engineering units. Temperature inputs can be programmed to display in degrees Fahrenheit or Celsius and the type K thermocouple can display up to 2300 °F.

Current & Voltage Inputs

Setting up the meter to accept a current or voltage input could not be easier. All setup is performed with the front panel buttons and there are no switches or jumpers to deal with.

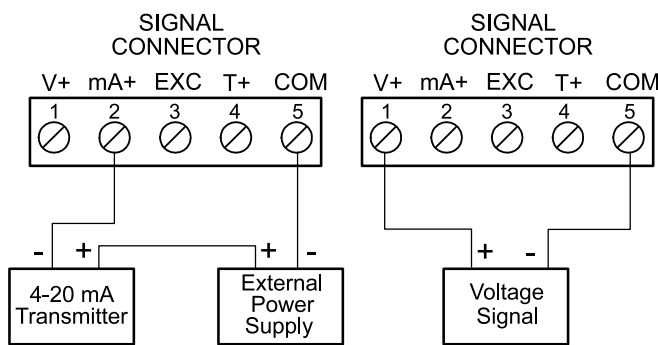

Transmitter Powered by External Supply

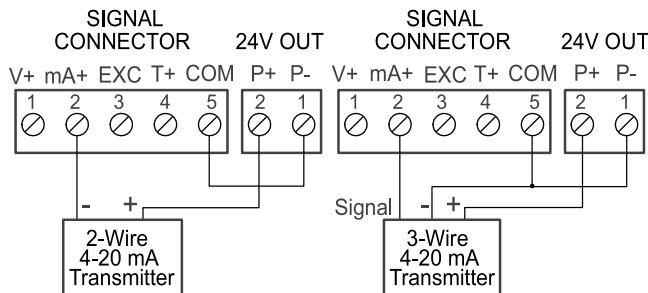

Transmitter Powered by Internal Supply (optional)


Current Overload Protection

To protect the instrument from unexpected current overload the current input circuit contains a resettable fuse. The fuse limits the current to a safe level when it detects a fault condition, and automatically resets itself when the fault condition is removed.

Thermocouple & RTD inputs


Setting up the Trident to accept a thermocouple or RTD input is simply a matter of setting a switch at the rear of the case and selecting the input type from the menu.

The meter accepts J, K, T, or E type thermocouples as well as two, three, or four-wire 100 Ω platinum RTDs.

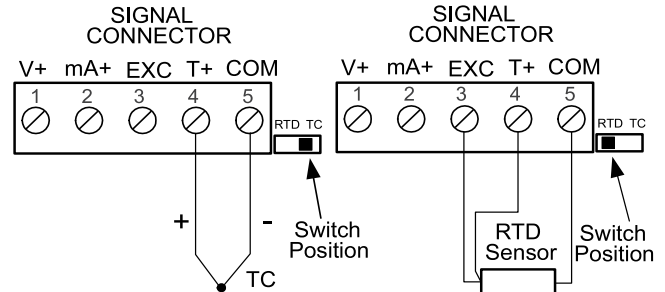

Thermocouple and RTD Inputs


Connectors Location

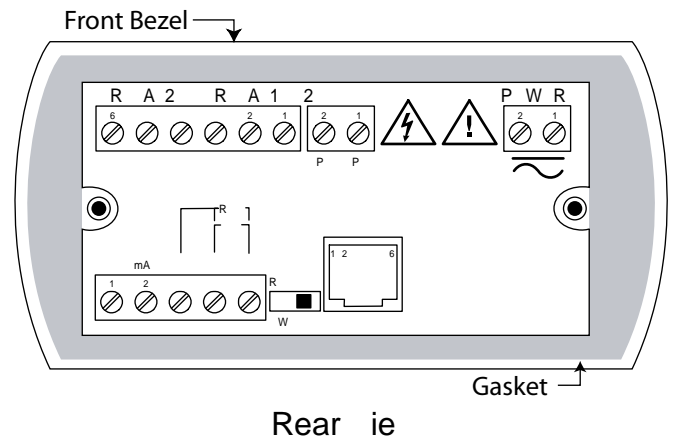

QUICK INSTALLATION

The Trident is housed in a shallow-depth case that is designed for easy installation and servicing. The extra large front bezel is rated Type 4X, IP65. The mounting brackets are locked in place to make it easy to mount the meter in the panel. Removable screw terminal connectors make for easy and convenient wiring.

Mounting Dimensions

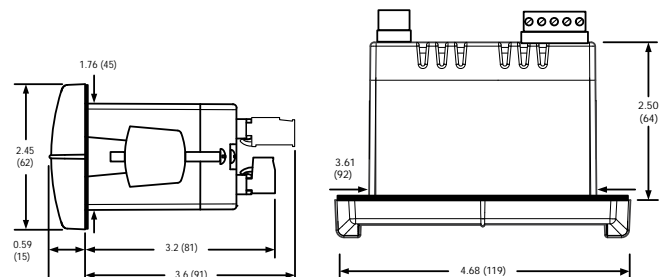

Notes:

1. Panel cutout required: 1.772 x 3.622 (45 x 92)
2. Panel thickness: 0.040 – 0.250 (1.0 – 6.4)
3. Mounting brackets lock in place for easy mounting

SPECIFICATIONS

Except where noted all specifications apply to operation at +25°C.

General

Display: Trident: 0.56" (14.2 mm); Trident X2: 1.20" (30.5 mm) red LED, 4 digits (-1999 to 9999)

Display Intensity: Eight user selectable intensity levels

Front Panel: NEMA 4X, IP65; panel gasket provided

Programming Methods: Four front panel buttons, cloning with Copy feature, PC with MeterView or LabVIEW software, and Modbus registers. Certified LabVIEW driver available.

Noise Filter: Programmable 2 to 199 (0 will disable filter)

Display Update Rate: Process/RTD: 3.7-5/sec; TC: 1.8-2.5/sec

Overrange: Display flashes 9999

Underrange: Display flashes -1999

Recalibration: All inputs are calibrated at the factory; recalibration is recommended at least every 12 months.

Max/Min Display: Stored until reset by user or meter is turned off.

Password: Restricts modification of programmed settings.

Non-Volatile Memory: Settings stored for a minimum of 10 years.

Power Options: 85-265 VAC, 50/60 Hz; 90-265 VDC, 20 W max or 12-36 VDC; 12-24 VAC, 6 W max.

Required Fuse: UL Recognized, 5 A max, slow-blow; up to 6 meters may share one fuse.

Normal Mode Rejection: 64 dB at 50/60 Hz

Isolation: 4 kV input/output-to-power line;

500 V input-to-output or output-to-24 VDC supplies

Operating Temperature: 0 to 65°C

Storage Temperature: -40 to 85°C

Relative Humidity: 0 to 90% non-condensing

Connections: Power & Signal: removable screw terminal blocks accept 12 to 22 AWG. Serial: RJ11 header, standard on all meters.

Enclosure: 1/8 DIN, high impact plastic, 94V-0, color; gray

Weight: 9.5 oz (269 g) (including options)

UL File Number: E160849; 508 Industrial Control Equipment

Warranty: 3 years parts & labor

Process Inputs

Inputs: Field selectable: 0-20 mA, 4-20 mA, 1-5 V, ± 10 V

Accuracy: $\pm 0.05\%$ FS ± 1 count; square root: $\pm 0.1\%$ FS ± 2 counts

Function: Linear or square root

Low-Flow Cutoff: 0 to 9999 (0 disables cutoff function)

Decimal Point: Up to 3 decimals: d.ddd, dd.dd, ddd.d, or dddd

Calibration: Scale without signal or calibrate with signal source

Calibration Range: User programmable over entire range of meter

Input Impedance: Voltage range: greater than 1 M Ω ,

Current range: 50-100 Ω , varies with resettable fuse impedance

Input Overload: Protected by automatically resettable fuse

Temperature Drift: ± 50 PPM/°C

Transmitter Supply: Isolated, one or two transmitter supplies

P1: 24 VDC $\pm 10\%$ @ 200 mA max (-1 option)

P1 & P2: 24 VDC $\pm 10\%$ @ 200 mA & 40 mA max (-2 option)

Temperature Inputs

Inputs: Factory calibrated, field selectable: type J, K, T, or E thermocouples and 100 Ω platinum RTD (0.00385 or 0.00392 curve)

Resolution: 1°; type T: 1° or 0.1°

Cold Junction Reference: Automatic

Temperature Drift: $\pm 2^\circ\text{C}$ maximum

Offset Adjustment: Programmable to $\pm 19.9^\circ$. This parameter allows the user to apply an offset value to the temperature being displayed.

Input Impedance: Greater than 100 k Ω

Sensor Break: All relays and alarm status LEDs go to alarm state.

Type	Range	Accuracy	Range	Accuracy
J	-58° to 1382°F	$\pm 2^\circ\text{F}$	-50° to 750°C	$\pm 1^\circ\text{C}$
K	-58° to 2300°F	$\pm 2^\circ\text{F}$	-50° to 1260°C	$\pm 1^\circ\text{C}$
T	-292° to 700°F	$\pm 2^\circ\text{F}$	-180° to 371°C	$\pm 1^\circ\text{C}$
E	-58° to 1700°F	$\pm 2^\circ\text{F}$	-50° to 927°C	$\pm 1^\circ\text{C}$
RTD	-328° to 1382°F	$\pm 1^\circ\text{F}$	-200° to 750°C	$\pm 1^\circ\text{C}$

Relays

Rating: 2 Form C (SPDT); rated 3 A @ 30 VDC or 3 A @ 250 VAC resistive load; 1/14 HP @ 125/250 VAC inductive loads

Deadband: 0-100% FS, user selectable

High or Low Alarm: User may program any alarm for high or low

Relay Operation:

1. Automatic (non-latching) 2. Latching 3. Pump alternation control

Relay Reset: User selectable via front panel buttons or PC

1. Automatic reset only (non-latching)

2. Automatic plus manual reset at any time (non-latching)

3. Manual reset only, at any time (latching)

4. Manual reset only after alarm condition has cleared (latching)

Automatic Reset: Relays reset when input passes the reset point

Manual Reset: Front panel button, MeterView, Modbus registers

Time Delay: 0 to 199 seconds, on and off delays; programmable

Fail-Safe Operation: Programmable, independent for each relay. Relay coils are energized in non-alarm condition. In case of power failure, relays will go to alarm state.

Auto Initialization: When power is applied to the meter, relays will reflect the state of the input to the meter.

Isolated 4-20 mA Transmitter Output

Scaling Range: 1.00 to 23.00 mA; reverse scaling allowed.

Calibration: Factory calibrated 4.00 to 20.00 mA

Accuracy: $\pm 0.1\%$ FS ± 0.004 mA

Temperature Drift: 50 PPM/°C

Note: Analog output drift is separate from input drift

Isolation: 500 V input-to-output or output-to-24 VDC supplies;

4 kV output-to-power line

External Power: 35 VDC maximum

Output Loop Resistance:	Loop Resistance	
Power Supply	Minimum	Maximum
24 VDC	10 Ω	700 Ω
35 VDC (external)	100 Ω	1200 Ω

Serial Communications

Compatibility: EIA-232, EIA-422, and EIA-485 with PDA7232 and PDA7422 Trident adapters.

Protocol: PDC and Modbus RTU

Meter Address: PDC protocol: 0 to 99, Modbus protocol: 1 to 247

Baud Rate: 300 to 19,200 bps

Transmit Time Delay: Programmable 0 to 199 ms or transmitter always on for RS-422 communications.

Data: 8 bit (1 start bit, 1 stop bit)

Parity: None (2 stop bits), even, or odd

(Modbus only; PDC protocol does not use parity)

Byte-to-Byte Timeout: 0.01 to 2.54 seconds (Modbus only)

Turn Around Delay: Less than 2 ms (fixed)

Refer to PDC and Modbus Serial Communications Protocol manuals for details.



Your Local Distributor is:

INSTRUMENTS • CONTROLS • VALVES

3317 Gilmore Industrial Blvd.
Louisville, KY 40213

Ph: (502) 966-3134
Fx: (502) 966-3135

www.arcoengineering.com

Disclaimer

The information contained in this document is subject to change without notice. Precision Digital Corporation makes no representations or warranties with respect to the contents hereof, and specifically disclaims any implied warranties of merchantability or fitness for a particular purpose.

©2009 Precision Digital Corporation. All rights reserved.

LDS765 J 11/09